



multitrap multi directional

Movimenti orizzontali e verticali.
Rapido aggiustamento delle traiettorie.
Alta solo 105 cm.
Capienza: 400 piattelli.
Peso: 100 kg.
Dimensioni: 90x60x80.

*Very reliable horizontal
and vertical movements rapid.
Adjustment of trajectories.
High only 105 cm.*

*Capacity: 400 targets.
Weight: kg 100.
Dimensions: 90x60x80.*

Alcuni Buoni Motivi per Scegliere MEC SYSTEM

- Sicurezza CE
- Affidabilità
- Materiali di altissima qualità
- Meccanica innovativa
- Precisione assoluta di lancio
- Facilissima da gestire
- Per la gestione campi elettronica delle migliori marche



Some Good Reason for Choose MEC SYSTEM

- Security CE
- Dependability and affidabile
- Material of hight quality
- Innovative engineering
- Throwing precision
- Easy manage
- Elettronics of better brand

separatrice separator

Rispetta l'Ambiente!

La separatrice separa la plastica dal metallo e consente il recupero di questi materiali.

Modalità di Utilizzo:

Riempire la tramoggia posta sulla parte superiore della macchina con bossoli di qualsiasi tipo e marca. Prestare attenzione che in mezzo ai bossoli non siano presenti frammenti di piatti, carta o altri materiali che possano ostruire il tubo di alimentazione. La macchina lavora su bossoli di calibro 12, 16, 20, 24 e 28.

Caratteristiche Tecniche:

Macchina a funzionamento elettropneumatico
Alim: W 220
Pressione: ATM 7
Capacità produttiva:
n. 2000 bossoli H
Dimensioni di ingombro:
H 1500 - L 750 - P 750 mm.
Peso: kg 130

Avvertenze:

Controllare periodicamente il livello dell'olio per il circuito pneumatico.
In caso di manutenzione chiudere preventivamente il rubinetto dell'aria.



Environmentally friendly!

The cartridge-case separator divides the plastic and metal parts allowing their recovery.

Operation instructions:


Fill up the hopper positioned on the upper side of the machine with cartridge-cases of any type and brand. Avoid to mix the cartridge-cases with pieces of broken clay-pigeons, paper or any other material that could obstruct the feeding tube. The machine operates for cartridge-cases with gauges of 12, 16, 20, 24 or 28 mm.

Technical data:

Electric pneumatic machine
Alim: W 220
Pressure: 7 bar
Production capacity: 2000
cartridge-cases/hour
Outside sizes: H 1500 - W 750 - D 750
Weight: Kg. 130

Remarks:

Check periodically the oil level of the pneumatic circuit.
In case of maintenance pay attention to preventively close the air-tap.



microfoni

Microfono ad alta intensità



Microfono N




MEC
• SYSTEM •


Via Torricella, 222 • 47863 NOVAFELTRIA (RN) • ITALY
Tel. +39 0541 922162
www.mecsystems.it • E-mail: info@mecsystems.it

MEC • SYSTEM •

tecnologia specializzata in impianti di tiro a volo e percorsi caccia

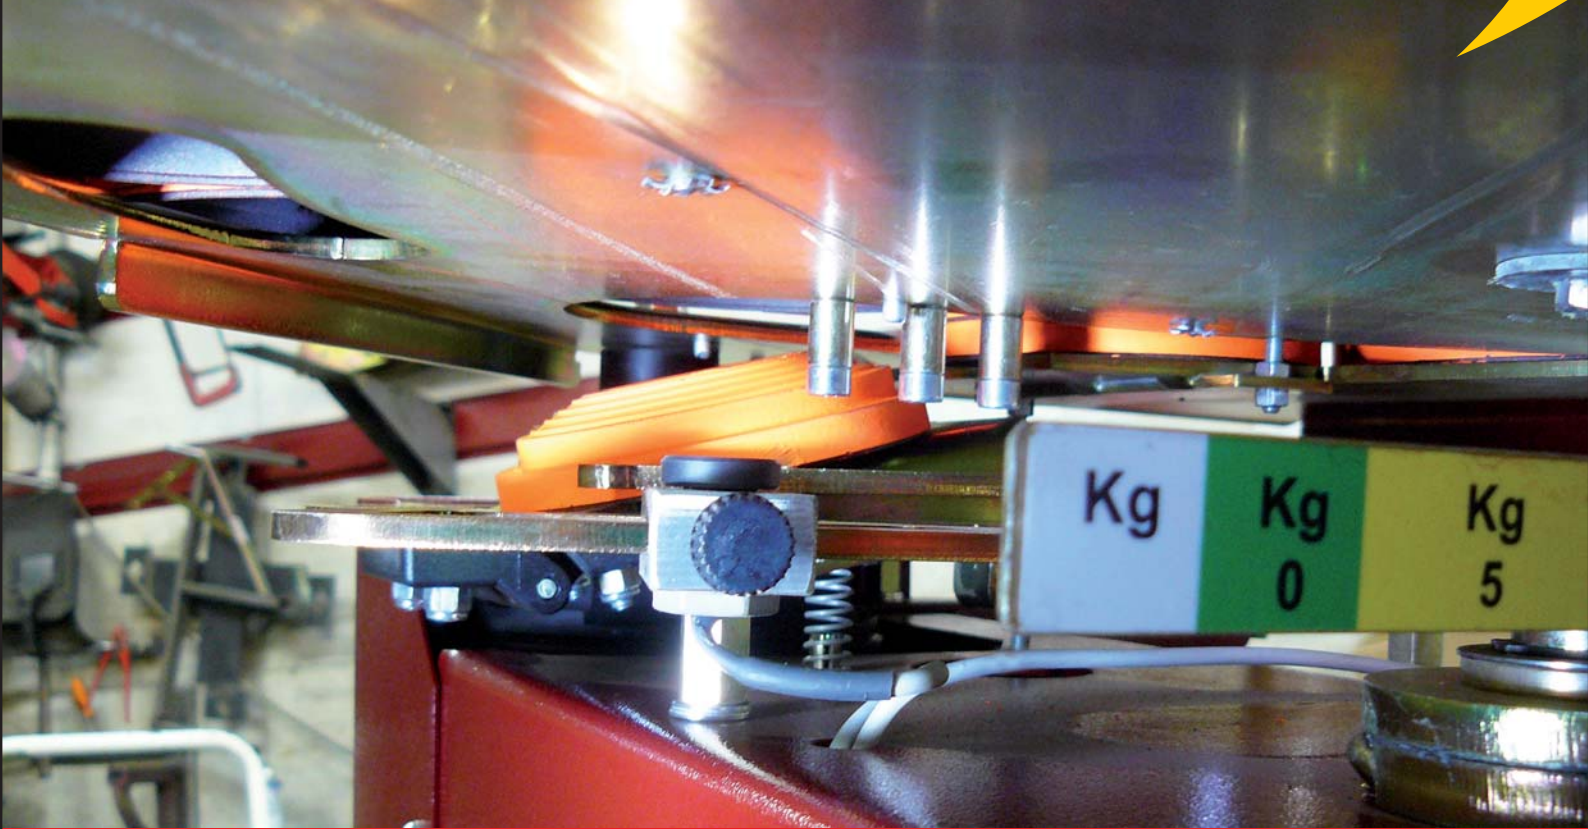

serie (Montefeltro)

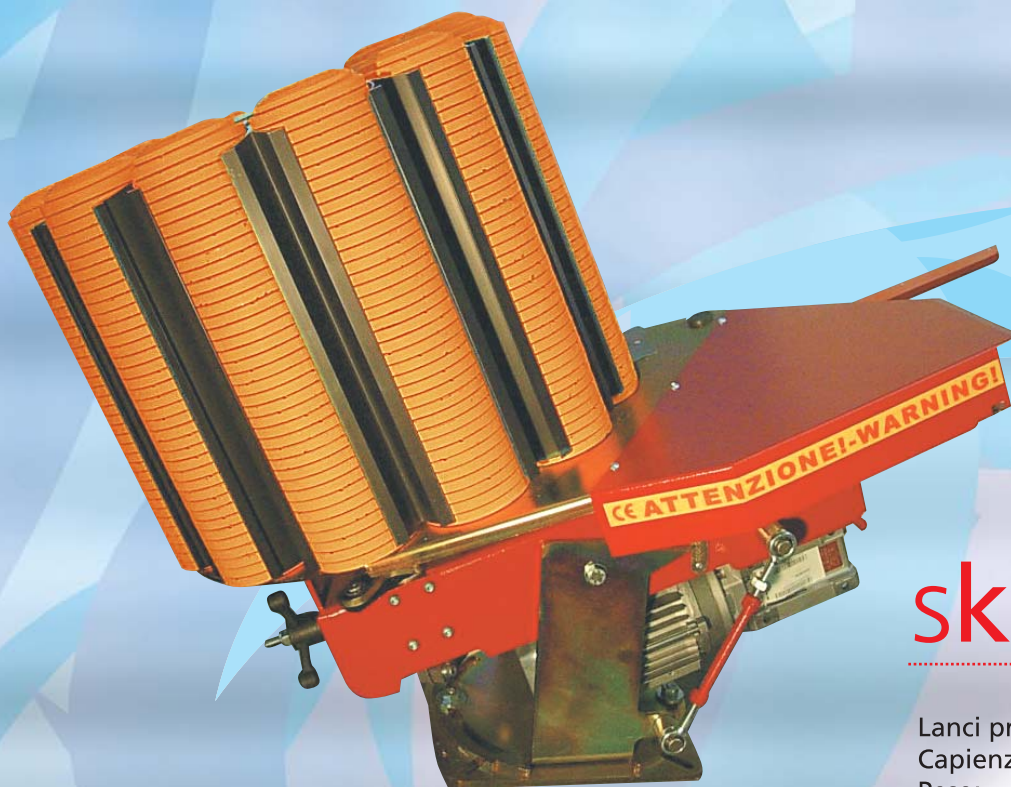

skeet

Lanci precisi, traiettorie lineari e regolabili.

Capienza: 500 piattelli.

Peso: 84 kg.

Dimensioni: 90x80x60.

*Precise launches and soft release
linear and adjustable trajectory.*

Capacity: 500 targets.

Dimensions: 90x80x60.

Weight: kg. 84.



universal P.C. sporting

lepre rabbit

Lancio piattello con ruota gommata.

Velocità del piattello regolabile.

Possibile doppio lancio dei piattelli.

Capienza: 500 piattelli

Peso: 50 Kg

Dimensioni: 65x100x60



Adjustable velocity of targets.

Possible double trowing of targets.

Capacity: 500 targets

Weight: Kg 50

Dimensions: 65x100x60

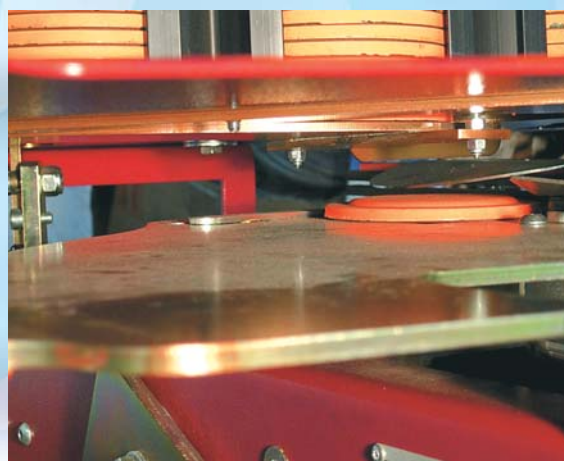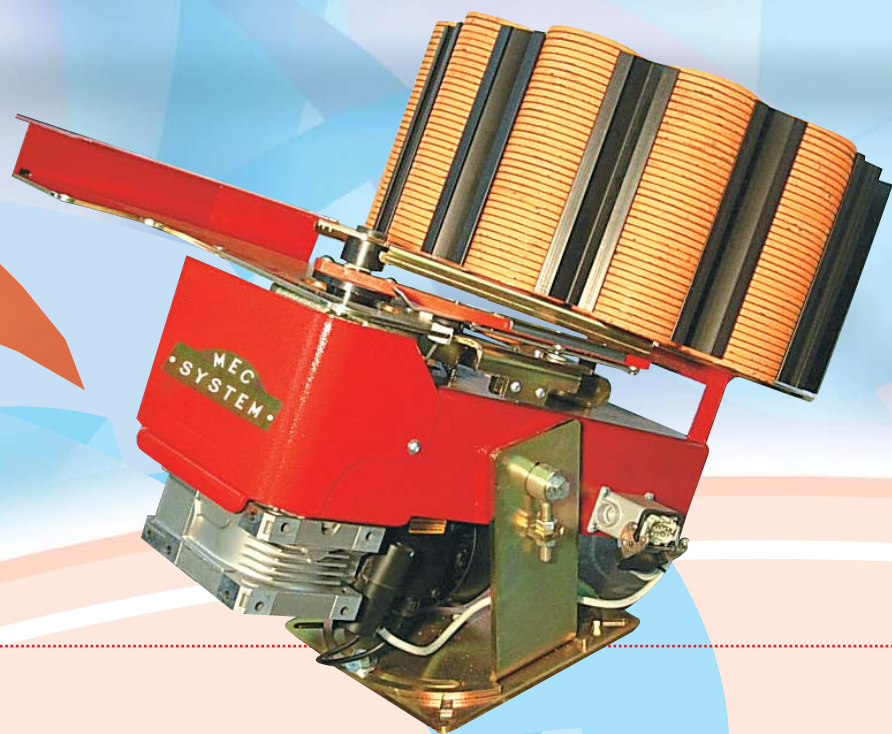


mini/batue

Destinata al percorso caccia.

Capienza: 500 piattelli.

Peso: 85 kg.

Dimensioni: 100x80x60.

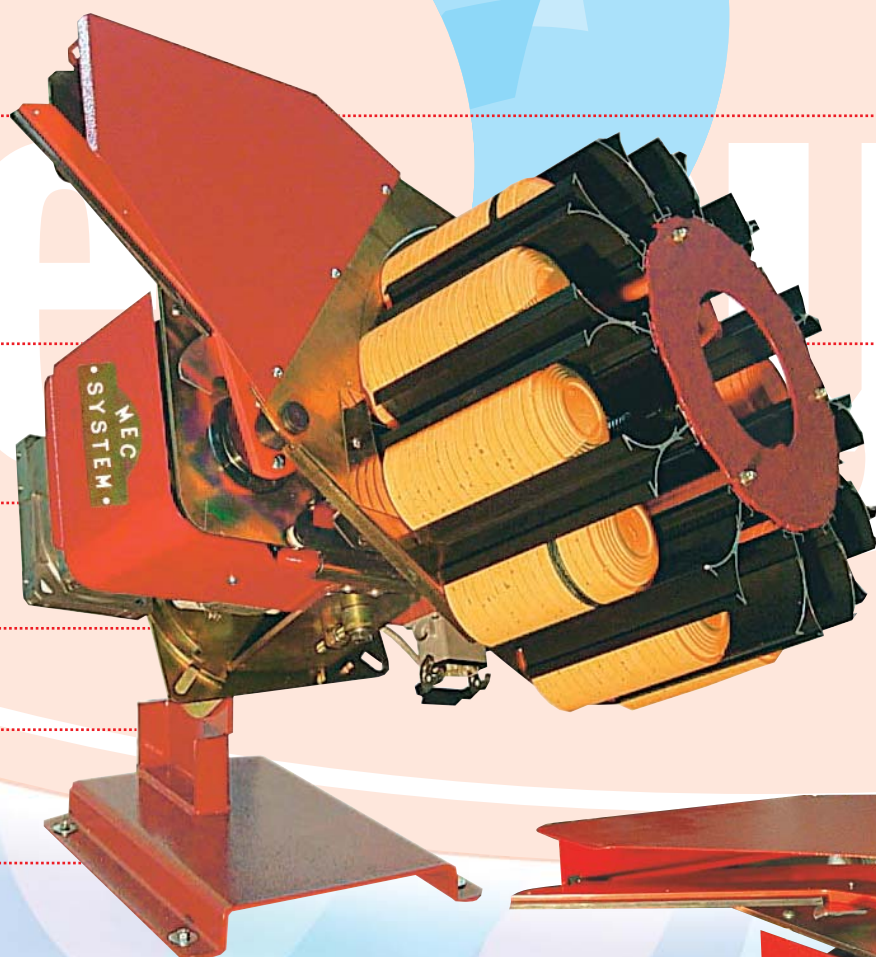



The parts of the these machines can be changed beetwen them. Hunting path.

Capacity: 500 targets.

Weight: kg. 85.

Dimensions: 100x80x60.

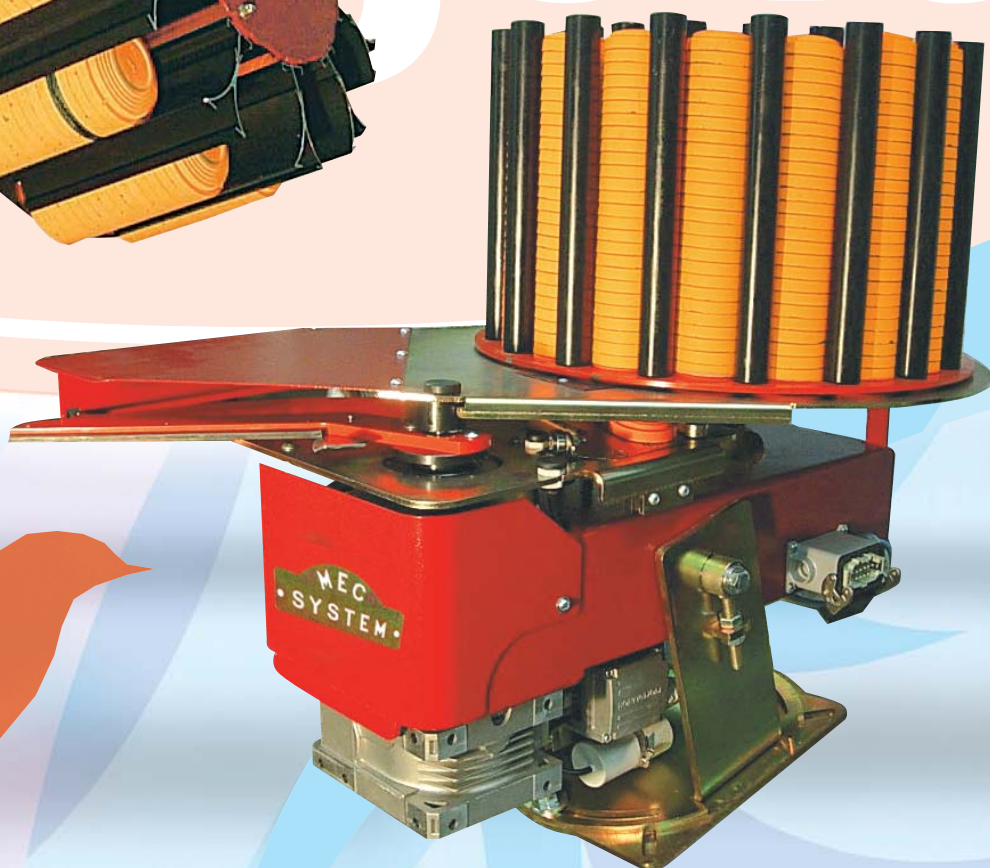

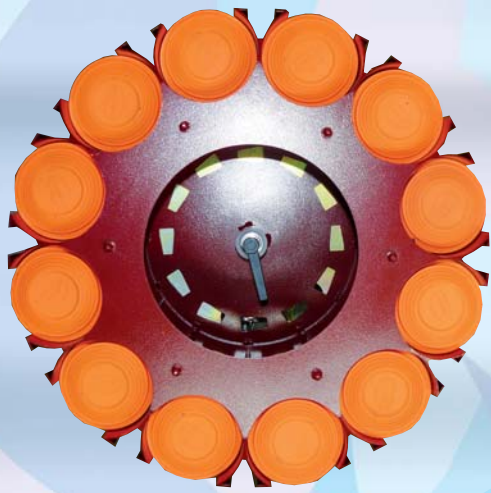

verticale teal

Destinata al percorso caccia.
Capienza: 400 piattelli.
Peso: 80 kg.
Dimensioni: 100x80x60.

*Mechanical.
Hunting path.
Capacity: 400 targets.
Weight: kg. 80.
Dimensions: 100x80x60.*



FO/FU

Ricarica del piattello in 2,5 secondi.
Distanza di tiro da 60 mt a 100 mt.
Funzionante a temperature da -40°C a + 50°C.
Rampa di lancio mobile.
Capienza: 12 colonne. Da 300 (FO) a 500 (PC)
piattelli standard.
Peso: 80 kg.
Dimensioni: hxixi 65x80x60.

*Re-cocking in 2.5 second.
Trowing distance of beetween 40 mt and 100
mt.
Operates in temperatures of -40°C to + 50°.
Mobile trowing plate.
Machine certificated CE (European Safety
Certificate)
Capacity: 12 column. 300 (FO) to 500 (PC)
standard targets.
Weight: 80 kg.
Dimensions: hxixi 65x80x60 cm.*

